


# SOUNDTUBE/GILDERFLUKE SD-25 6030-M 6020-M WIRING DIAGRAM

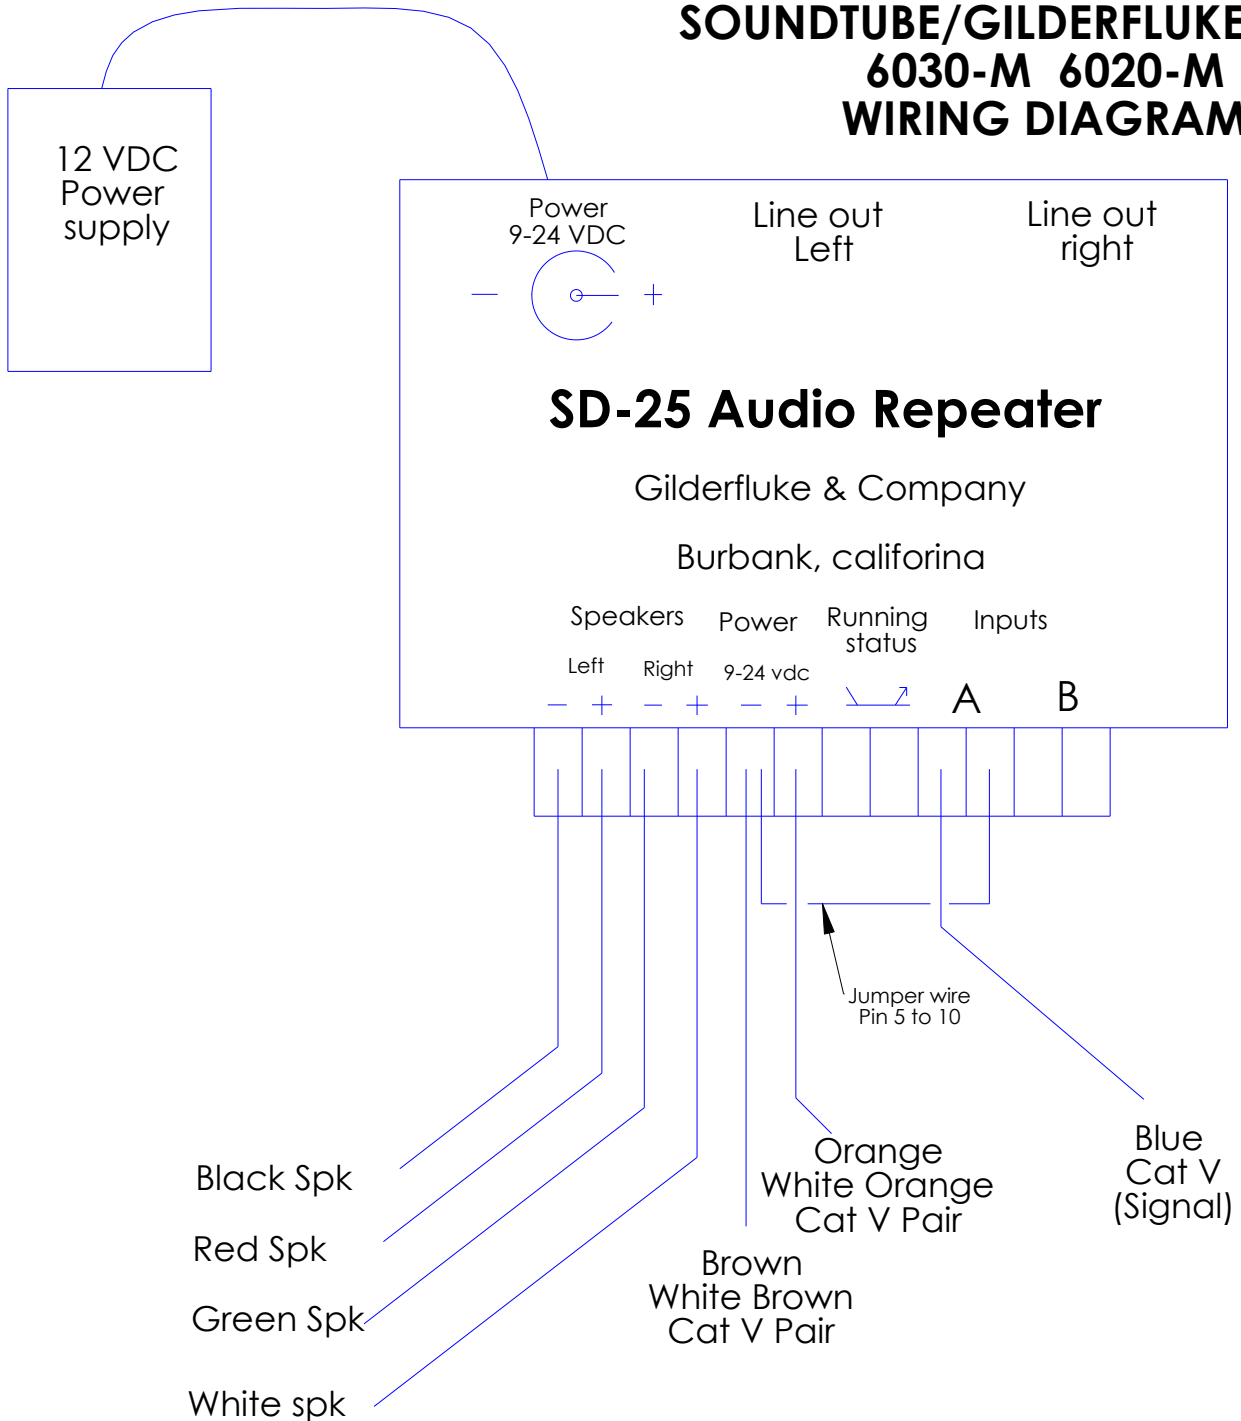

## Notes

- 1- 12 VDC is the maximum power input from the power supply if using soundtube motion sensor
- 2- If more volume is needed the SD-25 can be bridged and run in mono mode. Internal jumpers need to be set for this mode. Please see Sd-25 configuration & installation instructions.
- 3- For operating and playback modes please see SD-25 installation sheet.